

CHART:

ISO/IEC 11801, UL, ETL Verified TIA/EIA-568B.2-1 compliant, RoHS

L	T
L ≤ 1M	± 30MM
1M < L ≤ 5M	± 50MM
5M < L ≤ 10M	± 100MM
L > 10M	± 150MM

BK: RAL 9005, RD: RAL 3020, OR: RAL 1003, YL: RAL 1023,  
 GN: RAL 6001, BL: RAL 5002, PP: RAL 5022, GY: RAL 1013,  
 PK: RAL 3014



REMARK:



1. CABLE: UTP CAT. 6 CABLE 4P\*24AWG PVC
2. CONN. : P1 & P2: 8P8C PLUG, GOLD PLATED.
3. LABEL FOR PLASTIC BAG
4. CABLE ASS'Y MUST PASS CONTINUITY TEST.
5. PACKING: EACH CABLE IN POLY-BAG.

WIRE CONNECTION

COLOR (568B)	P1	PAIRS	P2
WHITE/ORANGE	1	————	1
ORANGE	2	————	2
WHITE/GREEN	3	————	3
BLUE	4	————	4
WHITE/BLUE	5	————	5
GREEN	6	————	6
WHITE/BROWN	7	————	7
BROWN	8	————	8

## PACKING

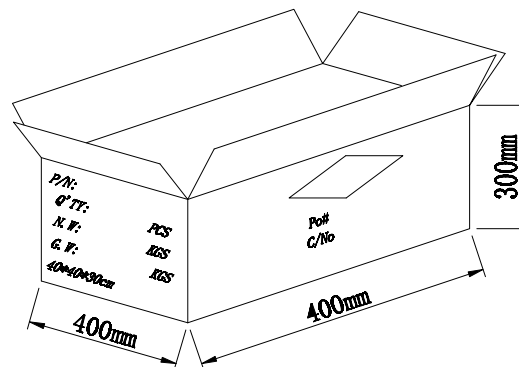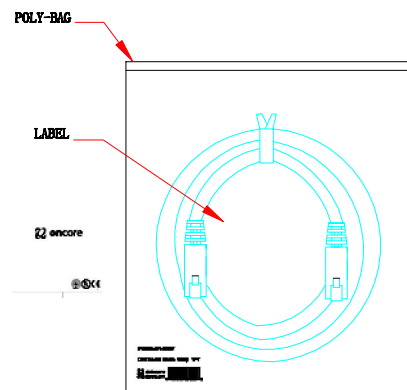

TOLERANCE INCHES			M/M						
. X	. 015	. 30							
. XX	. 010	. 10	SCALE	NONE		REV	A		
. XXX	. 005	. 05	UNIT	MM					
DRAWN BY	Jack	SHEET	1/1	DWG NO.					
		DATE	05/01/12						
CHECK BY	Leo	TITLE 8P8C PLUG/8P8C PLUG							
APPD BY	Susan	PART NO. PC6-XXFT-XX							